



CONTEG[®]
to complete your network



Headquarters Czech Republic:
Tel.: +420 261 219 182, Fax: +420 261 219 192
conteg@conteg.com, www.conteg.com

Czech Republic: +420 724 914 613
Eastern Europe: +49 172 848 4346
France: +33 686 074 386
GER, SUI, AUT: +49 170 523 4958
Middle East: +971 50 871 4563
Russia: +7 495 506 13 28
Western Europe: +32 476 215 089

Cut Sheet

AC-WM-80

Cut_Sheet_FR_30-06-09_conteg ©

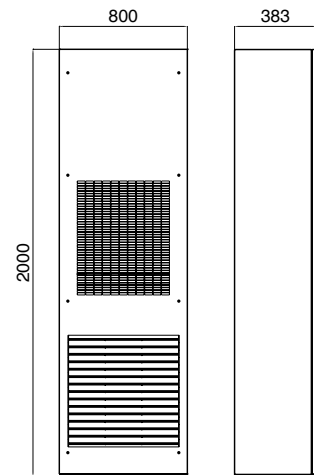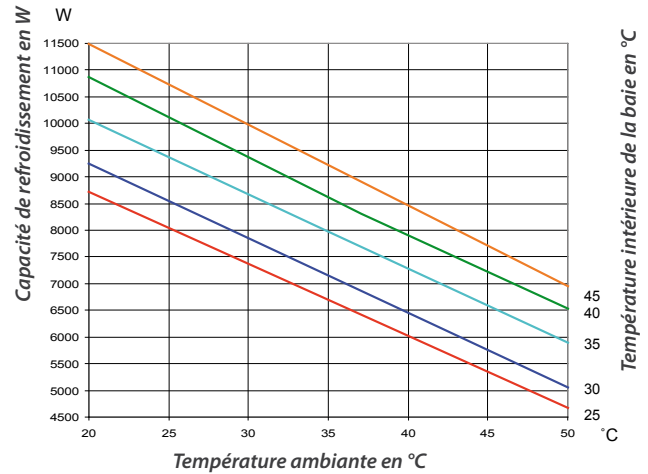

PARAMETRES	AC-WM-80-45/100	
Voltage	400-3-50/60	V-ph-Hz
Capacité de refroidissement L35L35 – DIN3168	8000	W
Capacité de refroidissement L35L50 – DIN3168	5900	W
Dimensions (HxLxP)	2000x800x383	mm
Intensité maximum en utilisation	7	A
Intensité de démarrage	28	A
Puissance absorbé L35L50	3619	W
Débit du ventilateur de la baie, air libre	3000	m ³ /h
Limites de température de la baie	25 - 45	°C
Limites de température ambiante	20 - 55	°C
Degré de protection de la baie	54	IP
Niveau de bruit	76	dB(A)
Poids	110	kg
Couleur	7035	RAL

